TP-Link TL-SG108-M2 switch No administrado 2.5G Ethernet (100/1000/2500) Negro

Marca : TP-Link

Código del producto: TL-SG108-M2

Nombre del producto : TL-SG108-M2



TP-Link TL-SG108-M2. Tipo de interruptor: No administrado. Puertos tipo básico de conmutación RJ-45 Ethernet: 2.5G Ethernet (100/1000/2500), Cantidad de puertos básicos de conmutación RJ-45 Ethernet: 8. Tabla de direcciones MAC: 16000 entradas, Capacidad de conmutación: 40 Gbit/s. Estándares de red: IEEE 802.3, IEEE 802.3ab, IEEE 802.3bz, IEEE 802.3p, IEEE 802.3u, IEEE 802.3x. Montaje de pared



Características de administración	
Tipo de interruptor *	No administrado
Calidad de servicio (QoS) soporte	✔

Puertos e Interfaces	
Cantidad de puertos básicos de conmutación RJ-45 Ethernet *	8
Puertos tipo básico de conmutación RJ-45 Ethernet *	2.5G Ethernet (100/1000/2500)
Número de puertos Ethernet 2,5G (cobre)	8

Conexión	
Estándares de red *	IEEE 802.3, IEEE 802.3ab, IEEE 802.3bz, IEEE 802.3p, IEEE 802.3u, IEEE 802.3x
Soporte 10G *	✘
Soporte de control de flujo	✔
Auto MDI / MDI-X	✔
Auto-negociación	✔

Transmisión de datos	
Capacidad de conmutación *	40 Gbit/s
Tasa de reenvío	29,8 Mpps
Tabla de direcciones MAC *	16000 entradas
Guardar y remitir	✔
Jumbo Frames, soporte	✔
Tramas Jumbo	10000
Memoria intermedia de paquetes	1,5 MB

Diseño	
Montaje en rack *	✘

Control de energía	
Fuente de energía *	CC
Fuente de alimentación incluida *	✔
Corriente de entrada	1.5 A
Voltaje de entrada	12 V

Alimentación a través de Ethernet (PoE)	
Energía sobre Ethernet (PoE) *	✘

Condiciones ambientales	
Intervalo de temperatura operativa	0 - 40 °C
Intervalo de temperatura de almacenaje	-40 - 70 °C
Intervalo de humedad relativa para funcionamiento	10 - 90%
Intervalo de humedad relativa durante almacenaje	5 - 90%
Disipación del calor	53,4 BTU/h

Peso y dimensiones	
Ancho	226 mm
Profundidad	131 mm
Altura	35 mm

Contenido del embalaje	
Cables incluidos	Corriente alterna, LAN (RJ-45)

Empaquetado	
Ancho del paquete	240 mm
Profundidad del paquete	315 mm
Altura del paquete	70 mm
Peso del paquete	1,35 kg

Diseño	
Color del producto	Negro
Indicadores LED	✔
Montaje de pared	✔

Desempeño	
Sin ventilador	✔

Datos logísticos	
Código de Sistema de Armomización (SA)	85176990



6935364052904



6935364052911



0845973089764



845973089764



1210002612685

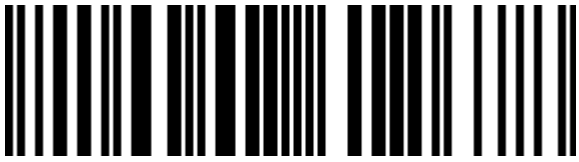

1210002612678



0840460605342



840460605342

Catalog Object Cloud



Disclaimer: The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 29-MAY-2026. Prints or copies of Information are only valid on the printed Publication date